

NEW GOLD INC. RAINY RIVER MINE

AMBIENT AIR QUALITY MONITORING PROGRAM SECOND QUARTER 2020 REPORT

AUGUST 2020



ACRONYMS AND ABBREVIATIONS

AAQC Ambient Air Quality Criteria

AAQO Alberta Ambient Air Quality Objectives

ACFM Cubic Feet Per Minute at Actual Conditions

AEP Alberta Environment and Parks

ASTM American Society for Testing and Materials

BCMOE British Columbia Ministry of the Environment

CAAQS Canadian Ambient Air Quality Standards

CFM Cubic Foot Per Minute

Hi-Vol High Volume Sampler

ICP/AES Inductively Coupled Plasma / Atomic Emission Spectroscopy

LPM Litres Per Minute

MECP Ministry of the Environment, Conservation and Parks

NIST National Institute of Standards and Technology

TSP Total Suspended Particulate

PM_{2.5} Particulate Matter less than 2.5 microns in diameter

US EPA United States Environmental Protection Agency

µg/m³ Microgram per Cubic Metre



TABLE OF CONTENTS

PAGE 1.0 INTRODUCTION.......1 2.0 ANALYTICAL AND MONITORING METHODS7 3.0 3.1 3.2 3.3 Total Dustfall 7 Passive Sampling for SO₂ and NO₂8 3.4 3.5 Hi-Vol & PQ200 Samplers8 3.5.1 Dustfall Samplers8 3.5.2 3.5.3 Passive Samplers......8 Performance and Site Audits9 3.5.4 Equipment and Sampling Issues9 3.5.5 4.0 RESULTS10 4.1 TSP and Metals10 4.2 4.3 Total Dustfall......11 4.4 Passive SO₂ and NO₂11 Evaluation of Effects of Abatement Measures on Monitored Concentrations......11 4.5 5.0 6.0 7.0 REFERENCES......18 8.0



LIST OF TABLES

PAG	GE
Table 2-1: Ambient Air Monitoring Stations	2
Table 4-1: Summary Statistics for Q2 2020 TSP Concentration Data	12
Table 4-2: Summary Statistics for Q2 2020 Metals Concentration Data	12
Table 4-3: Summary Statistics for Q2 2020 PM ₂₋₅ Concentration Data	13
Table 4-4: Summary Statistics for Q2 2020 Total Dustfall Data	13
Table 4-5: Summary Statistics for Q2 2020 Passive SO ₂ and NO ₂ Concentration Data	a13
LIST OF FIGURES	
Figure 2-1: Ambient Air Monitoring Stations	3
Figure 2-2: Ambient Air Monitoring – Southwest Monitoring Station	4
Figure 2-3: Ambient Air Monitoring – Northeast Monitoring Station	5
Figure 2-4: Ambient Air Monitoring – Air Quality and Meteorological Equipment	6
Figure 4-1: TSP Concentrations (Q2 2020)	14
Figure 4-2: PM _{2.5} Concentrations (Q2 2020)	14
Figure 4-3: Dustfall Concentrations (Q2 2020)	15
Figure 4-4: SO ₂ Concentrations (Q2 2020)	15
Figure 4-5: NO ₂ Concentrations (Q2 2020)	16

LIST OF APPENDICES

Appendix A Sampling Results



Appendix A-1 TSP, Metals, and PM_{2·5} Sampling Results

Appendix A-2 Total Dustfall Sampling Results

Appendix A-3 SO₂ and NO₂ Passive Sampling Result

Appendix B Notices of Exceedance for Q2 2020

Appendix C Laboratory Results – Certificates of Analysis

Appendix D PQ200 & TE-5170 Calibration Sheets – Q2 2020



1.0 INTRODUCTION

The following is a summary of the First Quarter (Q2) 2020 results for the ambient air quality monitoring program undertaken at New Gold Inc.'s Rainy River Mine located northwest of Emo, Ontario.

In Q2 of 2020, New Gold Inc. (New Gold) staff operated and maintained the ambient air quality monitoring sampling stations. They communicated with the laboratory staff as required, prepared the data summary reports, and performed one calibration on June 23, 2020.

This Quarterly Ambient Air Quality Report addresses the required elements of a Quarterly Report defined in the Operations Manual for Air Quality Monitoring in Ontario (MECP, 2018), hereafter referred to as the Operations Manual. Specifically, the following information is provided:

- Summary statistics
 - Arithmetic Mean
 - Monthly Arithmetic Mean
 - Maximum for any averaging period for which the data is used for comparison to any limit applied to the emitter;
 - Maximum 24-hour, % valid hours, or other averaging period as appropriate.
- Sampling dates (start and end where applicable); and
- A summary of exceedances of an Ontario Ambient Air Quality Criterion (AAQC), or Canadian Ambient Air Quality Standard (CAAQS).

The purpose of the air monitoring program is to quantify potential air quality effects associated with mine activities. The monitoring program consists of two sampling stations established in May 2015; one located to the southwest of the site near McMillan Road along the realigned Highway 600 and one located to the northeast of the site along Gallinger Road (Figures 2-1, 2-2, and 2-3). Each sampling station consists of the following:

- One High Volume (Hi-Vol) sampler for discrete sampling of Total Suspended Particulate (TSP) and metals;
- One PQ200 sampler for discrete sampling of respirable particulate matter (PM_{2.5});
- One standard passive dustfall collection unit; and
- One passive sampling enclosure measuring NO₂ and SO₂.

Figure 2-4 illustrates the Tait Road station.



Barron Site located near Heatwole Road also contains a meteorological station that provides real-time site wind speed, wind direction, temperature, relative humidity, and precipitation data.

The Ambient Air Monitoring Program was conducted per ECA 0412-A2LR4V and the MECP program approval letter dated November 9, 2016.



2.0 MONITORING STATIONS

The ambient air quality monitoring stations were sited in accordance with the criteria stipulated in the Operations Manual (MECP 2018).

The general location for the two stations is shown in Figure 2-1. UTM co-ordinates for each station based upon NAD 83, are presented in Table 2-1. Imagery showing each station are presented as Figures 2-2 and 2-3.

There were no changes to the station locations in Q2 2020.

Table 2-1: Ambient Air Monitoring Stations

Station	U	TM Co-ordina	ates	Davamatava Manifavad
Station	Easting (m)	Northing (m)	Zone	Parameters Monitored
Tait Road Station (Southwest Station)	426 072	5 406 996	15	TSP, metals, PM _{2·5} , NO ₂ , SO ₂ , total dustfall
Gallinger Road Station (Northeast Station)	431 133	5 410 534	15	TSP, metals, PM _{2·5} , NO ₂ , SO ₂ , total dustfall



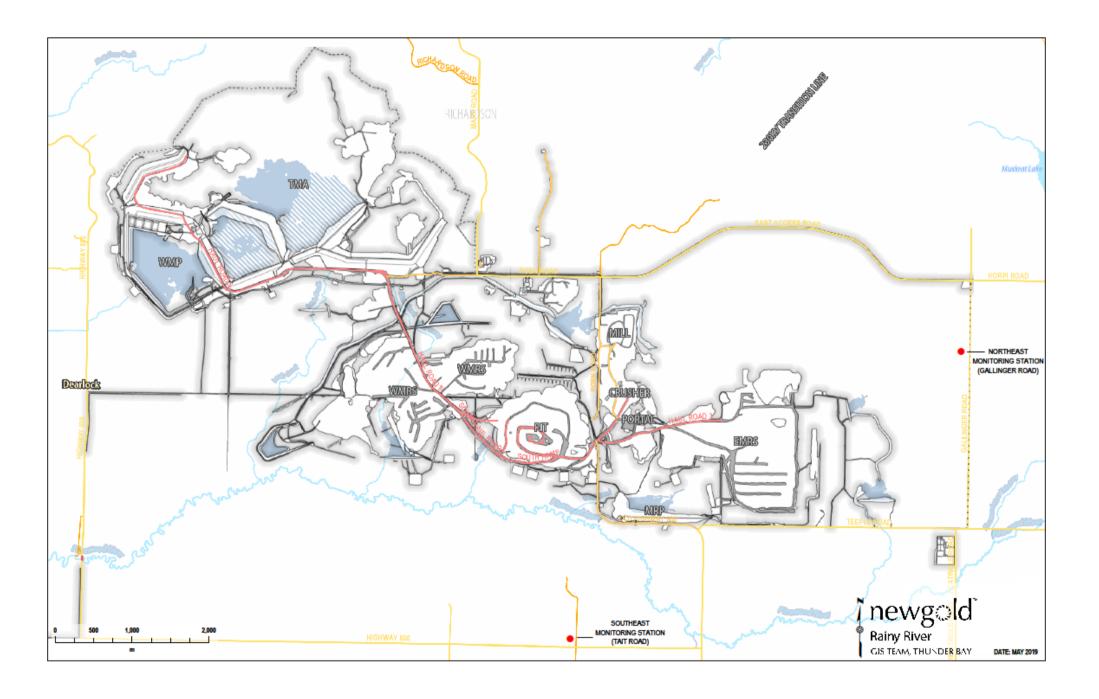


Figure 2-1: Ambient Air Monitoring Stations





Figure 2-2: Ambient Air Monitoring – Southwest Tait Road Monitoring Station





Figure 2-3: Ambient Air Monitoring – Northeast Gallinger Road Monitoring Station





Figure 2-4: Ambient Air Monitoring – Tait Road Station Air Quality Station



3.0 ANALYTICAL AND MONITORING METHODS

3.0 TSP and Metals

The TSP concentrations were determined using the standard gravimetric reference methods approved by the United States Environmental Protection Agency (US EPA) and the Ontario Ministry of the Environment, Conservation and Parks (MECP); as described in the Operations Manual (MECP 2018). Measurements of 24-hour average TSP and metal concentrations were collected as specified in the Operations Manual (MECP 2018); particulate samples were collected every sixth day as per the North American schedule (US EPA 2017). Sampling was performed with Hi-Vol samplers (brush motor and mass flow controlled). Metals and metalloids analyzed included the following: arsenic (As), cadmium (Cd), chromium (Cr), cobalt (Co), copper (Cu), iron (Fe), lead (Pb), manganese (Mn), nickel (Ni), selenium (Se), vanadium (V) and zinc (Zn). A metalloid is an element such as As that has both metallic and non-metallic properties.

Metal concentrations were determined using standard Inductively Coupled Plasma Atomic Emission Spectroscopy (ICP/AES) methodology. Method detection limits are as shown on the data sheets in Appendix A-1.

The lowest detectable limit of total particulate on the filter is 2.3 milligrams (mg). A typical 24-hour sample volume of 1,630 m³ results in a method detection limit of 1.4 micrograms per cubic metre (µg/m³).

Total Volume is calculated for each run using sampler manufacturer recommended calculations. These calculations consider ambient temperature, ambient pressure, sample flow rate, and individual monitor specifications.

3.1 PM_{2.5}

Sampling was performed with PQ200 samplers. PM_{2·5} concentrations were determined using the standard gravimetric reference methods approved by the US EPA and the MECP; as described in the Operations Manual (MECP 2018). PM_{2·5} measurements were collected over a 24-hour period to match the averaging time for the Canadian Ambient Air Quality Standard (CAAQS); particulate samples were collected every sixth day as per the North American schedule (US EPA 2017).

The lowest detectable limit of $PM_{2.5}$ on the Teflon filters is 15 µg. A typical 24-hour sample volume of 24 m³ results in a method detection limit of 0.6 µg/m³.

Total Volume is recorded mechanically by the PQ200 samplers for each run.

3.4 Total Dustfall

Water soluble and insoluble portions of dustfall were determined using ASTM method D-1739-98 and the British Columbia Ministry of Environment method outlined in Section G of Air



Constituents – Inorganic (MECP 2018). Standard dustfall samplers were used to measure total dustfall deposition. The method detection limit for total dustfall is 0.3 g/m²/30 days.

3.5 Passive Sampling for SO₂ and NO₂

 SO_2 and NO_2 concentrations were monitored with passive sampling devices. Testing was conducted using methodology developed, approved, and validated by Alberta Environment with the support of the Alberta Research Council, the Clean Air Strategic Alliance of Alberta, and the National Research Council of Canada.

Sample uptake is dependent on temperature, relative humidity, and wind speed. Analytical results are adjusted for these meteorological parameters measured during the exposure period (monthly averages). Required meteorological data were obtained from the Environment and Climate Change Canada website. Fort Frances meteorological station (Climate ID 6022474) is downloaded by Maxxam Analytics with each sample submission. For both SO₂ and NO₂, the analytical method detection limit is in the order of 0.1 parts per billion (ppb). Validation tests conducted in Alberta show that results from passive sampling are typically within 10% of those obtained from sampling with continuous analyzers for 30-day exposure periods.

Since there are no MECP guidelines for monthly concentrations of SO_2 and NO_2 obtained from passive sampling, the data is only used for screening purposes. For NO_2 , the monthly results were compared to the Ontario 24-hour AAQC converted to an equivalent 30-day average (78 $\mu g/m^3$) using the methodology outlined in the Procedure for Preparing an Emission Summary and Dispersion Modelling Report (MECP 2018). For SO_2 , the results were compared against the 30-day Alberta Ambient Air Quality Objective (AAAQO) of 30 $\mu g/m^3$ (AEP 2016).

3.6 Field Operations

3.6.1 Hi-Vol and PQ200 Samplers

To meet the requirements of 1 in 6-day sampling schedule, stations were visited once every six days. The exposed filter was recovered, and a pre-weighed filter installed for the subsequent sample run. Additional visits were made to resolve instrumentation issues and perform flow calibration checks and preventative/proactive maintenance.

New Gold staff performed flow, temperature, and barometric pressure calibrations on PQ200 samplers using an electronic BGI flow calibrator. The flows were calibrated to 16.7 litres per minute (LPM) or 0.5891 cubic foot per minute (CFM) for each station.

New Gold staff performed flow calibrations on Hi Vol TE-5170 samplers using a Tisch Delta Calibration kit.

The Q2 calibration was performed on all Hi-Vol and PQ200 samplers on June 23, 2020. Calibration sheets can be found in Appendix D.



3.6.2 Dustfall Samplers

The dustfall samplers containing algaecide were changed every month. Dustfall jars were provided by the laboratory with screw-on lids to prevent sample loss during transport.

3.6.3 Passive Samplers

The permeation filters in the passive samplers were changed every month. Filters were kept in cassettes inside Ziploc bags until deployed to prevent premature exposure. After the sample was collected, the filter was placed back in its cassette and into a Ziploc bag for shipment to the lab.

3.6.4 Performance and Site Audits

There were no MECP audits conducted in Q2 2020.

3.6.5 Equipment and Sampling Issues

During Q2 2020, 13 samples were invalidated, as discussed below:

- April 3: TSP sample Tait Road station was invalidated due to air volume of 4053 m³ exceeding theoretical air volume upper range value of 1794 m³ and the run time of 47.43 hours exceeding the upper range of 26.4 hours.
- April 9: TSP sample Tait Road station was invalidated due to unknown flow as the TSP sampler did not record the cfm.
- April 15: TSP sample Tait Road station was invalidated due to air volume of 1896 m³ exceeding theoretical air volume upper range value of 1794 m³.
- April 21: TSP sample Tait Road station was invalidated due to air volume of 2060 m³ exceeding theoretical air volume upper range value of 1794 m³.
- April 27: TSP sample Tait Road station was invalidated due to air volume of 1158 m³ exceeding theoretical air volume upper range value of 1794 m³ and the run time of 14.31 hours exceeding the lower range of 21.6 hours.
- May 3: TSP sample Tait Road station was invalidated due to air volume of 1945 m³ exceeding theoretical air volume upper range value of 1794 m³.
- May 9: TSP sample Tait Road station was invalidated due to air volume of 1995 m³ exceeding theoretical air volume upper range value of 1794 m³.
- May 21: TSP sample Tait Road station was invalidated due to air volume of 1336 m³ exceeding theoretical air volume lower range value of 1468 m³.



- June 8: TSP sample Tait Road station was invalidated due to air volume of 1352 m³ exceeding theoretical air volume lower range value of 1468 m³.
- April 3: TSP sample Gallinger Road station was invalidated due to air volume of 1968 m³ exceeding theoretical air volume upper range value of 1794 m³.
- April 15: TSP sample Gallinger Road station was invalidated due to air volume of 1945 m³ exceeding theoretical air volume upper range value of 1794 m³.
- April 21: TSP sample Gallinger Road station was invalidated due to unknown flow as the TSP sampler did not record the CFM.
- May 9: TSP sample Gallinger Road station was invalidated due to air volume of 183 m³ exceeding theoretical air volume upper range value of 1794 m³.



4.0 RESULTS

Sampling program results for Q2 2020 are presented in Appendix A-1 for the particulate and metals data, Appendix A-2 for the dustfall data and Appendix A-3 for the passive SO₂ and NO₂ data. For performing statistical analyses following MECP protocol, a value of half the detection limit was substituted for concentrations less than the detection limit. Laboratory Certificates of Analysis for all the samples collected in Q2 2020 can be found in Appendix C.

For comparative purposes, the Ontario AAQC and Canadian AAQS values are presented, where available, noting that the Ontario AAQCs are numerically equivalent to the Ontario Regulation 419/05 standards.

Summaries of the statistical analyses for Q2 2020 for the TSP, metals, and $PM_{2.5}$ concentrations are presented in Tables 4-1, 4-2, and 4-3, respectively. Table 4-1 and 4-2 statistics include valid and invalid data. During the quarter, the 1 in 6-day sampling schedule presented a possible 15 sampling days between April 1 and June 30, 2020.

A summary of the statistical analyses for Q2 2020 for the total dustfall data is presented in Table 4-4. A summary of the statistical analysis for the Q2 2020 passive SO₂ and NO₂ results is presented in Table 4-5.

4.1 TSP and Metals

The Tait Road station collected 2 valid samples, resulting in 40% valid data for Q2 2020. The Gallinger Road Station collected 5 valid samples, resulting in 73% valid data for Q2 2020. Therefore, the statistics for the TSP and Metals were created using the valid and invalid data.

For the quarter, the geometric mean TSP concentrations were 27.90 $\mu g/m^3$ for the Tait Road station and 26.72 $\mu g/m^3$ for the Gallinger Road station. Values reported by the laboratory as below the detection limit were substituted with one-half of the detection limit. The maximum 24-hour concentration for TSP was 73.30 $\mu g/m^3$ at the Tait Road station on April 21, 2020, and 222.087 $\mu g/m^3$ at the Gallinger Road station on April 3, 2020.

The Gallinger Road TSP value exceeded the Ontario AAQC value of 120 μg/m³ on April 3, 2020.

Appendix A-1 and Figure 4-1 present individual sample data. The Q2 2020 TSP and metals summary statistics of valid and invalid data are summarized in Tables 4-1 and 4-2, respectively.

4.2 PM_{2.5}

Both Tait Road and Gallinger stations collected 15 valid samples, resulting in 100% valid data for Q2 2020.

Values reported by the laboratory as below the detection limit were substituted with one-half of the detection limit. The maximum 24-hour concentration for $PM_{2.5}$ was 8.99 μ g/m³ at the Tait



Road station (April 27 22, 2020), and 7.41 µg/m³ at the Gallinger Road station (April 14, 2020).

There were no $PM_{2.5}$ exceedances of the Ontario AAQC of 30 μ g/m³ or CAAQS (ECCC 2013) of 28 μ g/m³ measured in Q2 2020. Appendix A-1 and Figure 4-2 present individual sample data.

The Q2 2020 PM_{2.5} summary statistics are summarized in Table 4-3.

4.3 Total Dustfall

In Q2 2020, three valid samples were collected at each station. Each dustfall jar was exposed for approximately 30-days to coincide with each calendar month in the quarter.

Values reported by the laboratory as below the detection limit were substituted with one-half of the detection limit. The maximum 30-day concentration for dustfall was 1.35 μ g/m³ at the Tait Road station (June), and 1.43 μ g/m³ at the Gallinger Road station (June).

There were no dustfall exceedances of the 30-day Ontario AAQC of 7 g/m² measured in Q2 2020 at either Tait Road or Gallinger Road stations.

A summary of the results is presented in Table 4-4 and the monthly results are presented in Appendix A-2.

4.4 Passive SO₂ and NO₂

In Q2 2020, 3 valid samples were collected at each station of each SO2 and NO2.

There are no MECP standards, guidelines, or Ontario AAQCs for SO_2 or NO_2 for a 30-day averaging period. The 30-day measured average SO_2 or NO_2 concentrations allow for future analysis of trends in the ambient concentrations, to identify any notable increases, and for potential comparison with dispersion modelling results.

For NO₂, the monthly results were compared to the Ontario 24-hour AAQC converted to an equivalent 30-day average (78 μ g/m³) using the methodology outlined in the Procedure for Preparing an Emission Summary and Dispersion Modelling Report (MECP 2018). For SO₂, the results were compared against the AAQO of 30 μ g/m³ (AEP 2017).

A summary of the passive results is presented in Table 4-5 and the monthly results are presented in Appendix A-3.

4.5 Evaluation of Effects of Abatement Measures on Monitored Concentrations

The Rainy River Mine has a comprehensive Best Management Practices Plan (BMPP) for Fugitive Dust approved by the MECP as part of the ECA review process. This BMPP effectively controls the generation and dispersion of dust such that the particulate matter measured at the two ambient monitoring stations was below the Ontario AAQC for all Q2 2020 samples.



Table 4-1: Summary Statistics For Q2 2020 TSP Concentration for Valid and Invalid Data

Statistics	Tait Road (SW)	Gallinger (NE)
Geometric mean (µg/m³)	27.60	26.72
Arithmetic mean (μg/m³)	36.46	44.21
Jan Maximum (µg/m³)	73.30	222.09
Feb Maximum (µg/m³)	62.66	38.70
Mar Maximum (µg/m³)	55.03	67.60
Maximum 24-hr (µg/m³)	73.30	222.09
90th percentile	60.37	86.14
95th percentile	66.38	138.89
24-hr Ontario AAQC	120	120
No. Valid Samples	14	14
Valid Data	40%	73%
No. Samples > Ontario AAQC (particulate)	1	1
No. Samples > Ontario AAQC (metals)	1	1
No. Samples > Ontario AAQC (metalloids)	0	0

Table 4-2: Summary Statistics For Q2 2020 Metals Concentration for Valid and Invalid Data

	04 h	Tait Road	(SW)	Gallinger Road (NE)				
Metal	24-hr Ontario AAQC (μg/m³)	Maximum 24-hr Concentration (μg/m³)	Fraction of 24-hr Ontario AAQC	Maximum 24-hr Concentration (μg/m³)	Fraction of 24-hr Ontario AAQC			
As	0.3	0.0013	0.43%	0.0009	0.31%			
Cd	0.025	0.0009	3.45%	0.0006	2.51%			
Cr	0.5	0.0022	0.43%	0.0016	0.31%			
Со	0.1	0.0009	0.86%	0.0006	0.63%			
Cu	50	0.0729	0.15%	0.1529	0.31%			
Fe	4	1.4144	35.36%	1.2599	31.50%			
Pb	0.5	0.0013	0.26%	0.0023	0.46%			
Mn	0.4	0.0431	10.78%	0.0424	10.60%			
Ni	0.2	0.0013	0.65%	0.0009	0.47%			
Se	10	0.0043	0.04%	0.0031	0.03%			



	I AAQC I	Tait Road	(SW)	Gallinger Road (NE)			
Metal		Maximum 24-hr Concentration (μg/m³)	Fraction of 24-hr Ontario AAQC	Maximum 24-hr Concentration (μg/m³)	Fraction of 24-hr Ontario AAQC		
V	2	0.0022	0.11%	0.0016	0.08%		
Zn	120	0.0245	0.02%	0.0421	0.04%		

Table 4-3: Summary Statistics for Q2 2020 PM_{2.5} Concentration Data

Statistics	Tait Road (SW)	Gallinger (NE)
Arithmetic mean (µg/m³)	2.73	2.64
April Maximum (µg/m³)	8.99	7.41
May Maximum (μg/m³)	4.12	4.49
June Maximum (µg/m³)	7.15	4.08
Maximum 24-hr (μg/m³)	8.99	7.41
90th percentile	5.94	4.33
95th percentile	7.70	5.37
24-hr CAAQS	28	28
No. Valid Samples	15	15
Valid Data	100%	100%
No. Samples > Ontario AAQC (particulate)	0	0

Table 4-4: Summary Statistics for Q2 2020 Total Dustfall Data

Statistics	Tait Road (SW)	Gallinger (NE)
Arithmetic mean (µg/m³/30d)	2.93	2.37
Maximum 24-hr (µg/m³/30d)	4.02	4.32
30-day Ontario AAQC	7	7
No. > Ontario AAQC	0	0
No. Valid Samples	3	3
Valid Data	100%	100%

Т



able 4-5: Summary Statistics for Q2 2020 Passive SO₂ and NO₂ Concentration Data

Statistics	Tait Ro	ad (SW)	Gallinger	Road (NE)
Statistics	SO ₂	NO ₂	SO ₂	NO ₂
Mean (µg/m³)	0.262	0.595	0.131	0.345
Maximum (μg/m³)	0.524	1.128	0.131	0.564
Ontario AAQC* 24-hr converted to 30 day (µg/m³)	N/A	78	N/A	78
AAAQO (μg/m³)	30	N/A	30	N/A
No. valid samples (μg/m³)	3	3	3	3
Valid data	100%	100%	100%	100%
Detection Limit	0.188	0.262	0.262	0.188



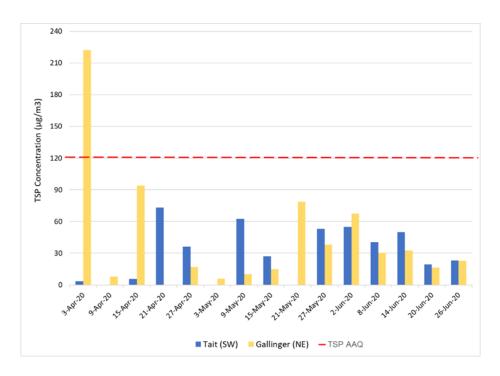


Figure 4-1: TSP Concentrations (Valid and Invalid Data) (Q2 2020)

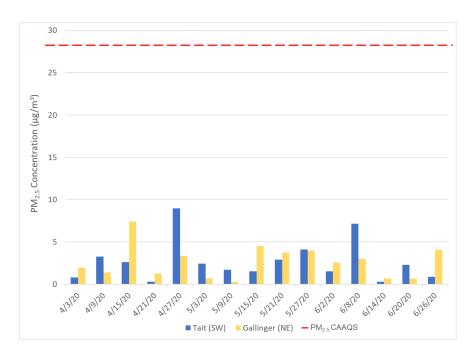


Figure 4-2: PM_{2.5} Concentrations (Q2 2020)



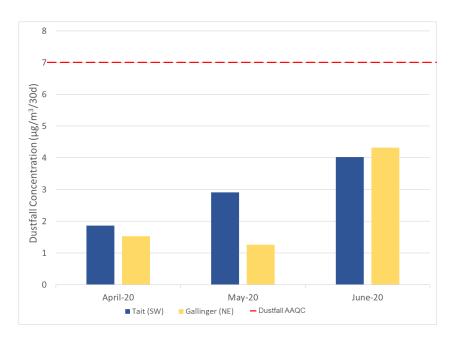


Figure 4-3: Dustfall Concentrations (Q2 2020)

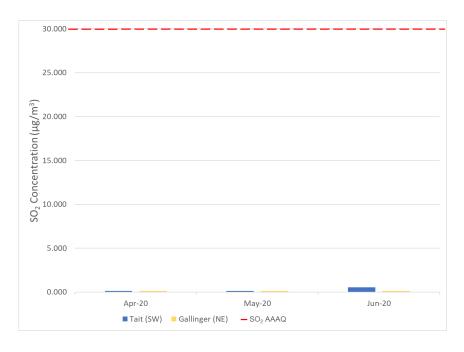


Figure 4-4: SO₂ Concentrations (Q2 2020)



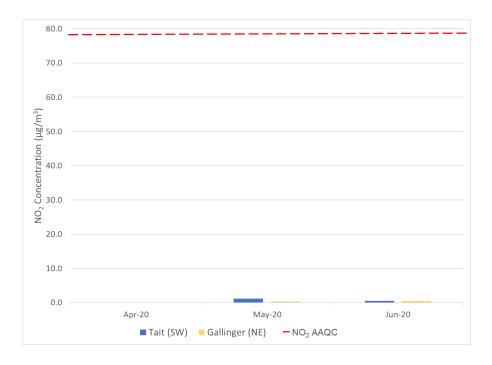


Figure 4-5: NO₂ Concentrations (Q2 2020)



5.0 MITIGATION MEASURES

In Q1 2020, 23 out of the 30 TSP samples were invalid. Majority of which were due to variable flow through the Hi Vol TE-5170. The measures listed below were implemented mid of May 2020 to mitigate the issues will invalid flows.

- Additions to the air quality sampling procedure such as:
 - A check of the flow controller to ensure that the flow is being maintained (controller alters the motor speed to maintain a constant flow rate) and confirmation of the correct time of day after each sample run
 - Review of previous samples flow measurement and comparing it to the Operations manual's limits after each sample run
 - A review will be performed of the ΔP from the pressure tap on the motor casing with a digital manometer to confirm that the ΔP is in the expected range.
 - The face plate gasket will be cleaned after is sample run.
 - Will be cleaned with soap and water periodically, especially under the roof and the filter cassette supporting surface
 - The filter holder, especially the gasket and horn, will be cleaned at every filter change and inspected for evidence of leakage.
 - Further training for New Gold Personnel on the maintenance and calibration of the equipment
 - Replacement of brushes and replacement of motors for the Hi Vol TE-5170
 - Development of a maintenance schedule for an assessment of the equipment

21.5% of the first 14 samples taken in Q2 2020 had valid flows. Compared to the last 16 samples taken, which was after the mitigation measures above were implemented, 88% had valid flows. This shows that the above measures have significantly improve the sampling procedure. New Gold will continue to look for any improvement that could be made in the sampling procedures.



6.0 CONCLUSIONS

A summary of the Q2 2020 ambient air quality monitoring program results is provided below:

- The Tait Road station collected 6 valid TSP samples, resulting in40% sample validity. The Gallinger Road Station collected 11 valid TSP samples, resulting in 73% sample validity. Metal and metalloid concentrations were measured on each of the valid TSP filters.
- There were one exceedances of the TSP in Q2 2020 during the month of April. Details can be found in Appendix B.
- 15 valid PM2.5 samples were collected at the Tait and Gallinger Road stations, resulting in 100% valid data, overall. There were no exceedances of the 24-hour PM2.5 CAAQS in Q2 2020.
- 3 valid dustfall samples were collected at each station (100% sample validity). There were no exceedances of the 30-day dustfall Ontario AAQC in Q2 2020.
- 3 valid passive SO2 and NO2 samples were collected at each of the two stations (100% sample validity). There were no exceedances of AAAQO for SO2 or the 30-day equivalent Ontario AAQC for NO₂ in Q2 2020.



7.0 REFERENCES

Alberta Environment and Parks (AEP). 2017. Alberta Ambient Air Quality Objectives and Guidelines Summary.

American Society for Testing and Materials (ASTM). 2004. Standard Test Method for Collection and Measurement of Dustfall (Settleable Particulate Matter).

British Columbia Ministry of the Environment. 2007. Section G of Air Constituents – Inorganic. Environment Canada (ECCC). 2013. Canadian Environmental Protection Act, 1999 Sections 54 and 55. Ministry of the Environment Conservation and Parks (MECP). 2018. Procedure for Preparing and Emission Summary and Dispersion Modelling Report.

Ministry of the Environment Conservation and Parks (MECP). Updates: April 30, 2019. Ontario's Ambient Air Quality Criteria, PIBS # 6570e01.

Ministry of the Environment Conservation and Parks (MECP). 2018. Operations Manual for Air Quality Monitoring in Ontario.

Ministry of the Environment Conservation and Parks (MECP). 2016c. Determination of Total Dustfall in Air Particulate Matter by Gravimetry, E3043.

United States Environmental Protection Agency (USEPA). 2017. Sampling Schedule Calendar, https://www3.epa.gov/ttnamti1/calendar.html (Accessed February 10, 2017).



8.0 CLOSING

This Rainy River Mine Ambient Air Quality Monitoring Program First Quarter 2020 Report was prepared by New Gold Inc. The quality of information, conclusions and estimates contained herein are based on:

- information available at the time of preparation;
 - data supplied by outside sources; and
 - the assumptions, conditions and qualifications set forth in this document.

If you require further information regarding the above or the mine in general, please contact the undersigned at (807) 482-0900 ext. 8064.

Sincerely,

New Gold Inc. Rainy River Mine

Prepared by:

<original signed by>

Matthew Wilson Environmental Specialist

Approved by:

Sylvie St. Jean Environment Manager



APPENDIX A

SAMPLING RESULTS

Appendix A-1 TSP, Metals and PM_{2.5} Sampling Results

Appendix A-2 Total Dustfall Sampling Results

Appendix A-3 SO₂ and NO₂ Passive Sampling Results



APPENDIX A-1

TSP, METALS AND PM_{2.5} SAMPLING RESULTS



			Southwes	st Tait Road M	lonitoring Re	esults (Valid)	for TSP and	Metals (Secon	d Quarter 20	20)				
						ults expresse		•		<u> </u>				
Date	PM2.5	TSP	As	Cd	Cr	Со	Cu	Fe	Pb	Mn	Ni	Se	٧	Zn
4/3/20	0.791						1		-	-				
4/9/20	3.289													
4/15/20	2.622													
4/21/20	<u>0.312</u>													
4/27/20	8.989													
5/3/20	2.456													
5/9/20	1.707													
5/15/20	1.540	27.036	<u>9.66E-04</u>	<u>6.44E-04</u>	<u>1.61E-03</u>	<u>6.44E-04</u>	0.059	0.388	9.66E-04	0.010	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.009
5/21/20	2.913									-				
5/27/20	4.123	53.034	<u>9.68E-04</u>	<u>6.45E-04</u>	<u>1.61E-03</u>	<u>6.45E-04</u>	0.051	0.459	<u>9.68E-04</u>	0.020	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.022
6/2/20	1.540	55.028	<u>9.19E-04</u>	<u>6.13E-04</u>	<u>1.53E-03</u>	<u>6.13E-04</u>	0.069	1.048	<u>9.19E-04</u>	0.038	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.015
6/8/20	7.155													
6/14/20	<u>0.312</u>	50.174	<u>9.14E-04</u>	<u>6.10E-04</u>	<u>1.52E-03</u>	<u>6.10E-04</u>	0.034	1.414	<u>9.14E-04</u>	0.043	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.015
6/20/20	2.289	19.336	<u>9.39E-04</u>	<u>6.26E-04</u>	<u>1.56E-03</u>	<u>6.26E-04</u>	0.043	0.496	<u>9.39E-04</u>	0.012	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.007
6/26/20	0.874	23.179	<u>9.77E-04</u>	<u>6.51E-04</u>	<u>1.63E-03</u>	<u>6.51E-04</u>	0.064	0.334	<u>9.77E-04</u>	0.008	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.006
Geometric mean	1.85	34.79	9.47E-04	6.31E-04	1.58E-03	6.31E-04	5.17E-02	5.93E-01	9.47E-04	1.76E-02	9.47E-04	3.16E-03	1.58E-03	1.08E-02
Arithmetic mean	2.73	37.96	9.47E-04	6.31E-04 6.31E-04	1.58E-03	6.31E-04 6.31E-04		6.90E-01	9.47E-04 9.47E-04	2.17E-02	9.47E-04 9.47E-04	3.16E-03	1.58E-03	1.00E-02 1.22E-02
	8.99						5.32E-02	1.41E+00						
Max. concentration Min. concentration	0.31	55.03 19.34	9.77E-04 9.14E-04	6.51E-04 6.10E-04	1.63E-03 1.52E-03	6.51E-04 6.10E-04	6.86E-02 3.40E-02	3.34E-01	9.77E-04 9.14E-04	4.31E-02 7.55E-03	9.77E-04 9.14E-04	3.26E-03 3.05E-03	1.63E-03 1.52E-03	2.21E-02 5.53E-03
90th percentile	5.94	54.03	9.72E-04	6.10E-04 6.48E-04	1.62E-03	6.10E-04 6.48E-04	6.61E-02	1.23E+00	9.14E-04 9.72E-04	4.06E-02	9.14E-04 9.72E-04	3.05E-03 3.24E-03	1.52E-03 1.62E-03	1.88E-02
95th percentile	7.70	54.53	9.74E-04	6.50E-04	1.62E-03	6.50E-04	6.74E-02	1.32E+00	9.72E-04 9.74E-04	4.00E-02 4.18E-02	9.72E-04 9.74E-04	3.25E-03	1.62E-03	2.04E-02
CAAQS	28	N/A	9.74L-04 N/A	N/A	N/A	0.50L-04 N/A	0.74L-02 N/A	N/A	9.74L-04 N/A	N/A	9.74L-04 N/A	N/A	N/A	N/A
No. > CAAQS value*	0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AAQC	N/A	120	0.3	0.025	0.5	0.1	50	4	0.5	0.4	0.2	10	2	120
No. > AAQC	0	0	0	0	0	0	0	0	0	0	0	0	0	0
No. of valid samples	15	6	6	6	6	6	6	6	6	6	6	6	6	6
No. samples < mdl	2	0	6	6	6	6	0	0	6	0	6	6	6	0
Detection limit (µg)	15	2300	3	2	5	2	4	20	3	1	3	10	5	5
Half detection limit (µg)	7.5	1150	1.5	1	2.5	1	2	10	1.5	0.5	1.5	5	2.5	2.5
% < detection limit	13	0	100	100	100	100	0	0	100	0	100	100	100	0
% valid data	100	40	40	40	40	40	40	40	40	40	40	40	40	40

Notes: All non-detectable results were reported as 1/2 detection limit and are denoted by italics & underlining (If samples had differing detection limits, the highest is displayed here) N/A: Not applicable

^{—:} Invalid Sample

^{*}Canadian Ambient Air Quality Standard, 24-hour standard



					(resu	Its expresse	ed in µa/m3)							
Date	PM2.5	TSP	As	Cd	Cr	Со	Cu	Fe	Pb	Mn	Ni	Se	V	Zn
4/3/20	1.958			-					-	1	1		1	
4/9/20	1.373	7.839	<u>8.52E-04</u>	<u>5.68E-04</u>	1.42E-03	<u>5.68E-04</u>	0.030	0.070	<u>8.52E-04</u>	0.002	<u>0.001</u>	<u>0.003</u>	<u>0.001</u>	0.006
4/15/20	7.407													
4/21/20	1.291													
4/27/20	3.332	17.126	<u>9.05E-04</u>	<u>6.03E-04</u>	<u>1.51E-03</u>	<u>6.03E-04</u>	0.031	0.502	<u>9.05E-04</u>	0.016	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.008
5/3/20	0.708	6.020	<u>9.31E-04</u>	<u>6.21E-04</u>	<u>1.55E-03</u>	<u>6.21E-04</u>	0.038	0.079	<u>9.31E-04</u>	0.002	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.007
5/9/20	<u>0.312</u>													
5/15/20	4.494	14.785	<u>9.20E-04</u>	<u>6.13E-04</u>	<u>1.53E-03</u>	<u>6.13E-04</u>	0.097	0.148	<u>9.20E-04</u>	0.005	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.008
5/21/20	3.745	38.701	<u>9.36E-04</u>	<u>6.24E-04</u>	<u>1.56E-03</u>	<u>6.24E-04</u>	0.069	0.416	<u>9.36E-04</u>	0.013	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.014
5/27/20	3.953	38.093	<u>9.31E-04</u>	<u>6.20E-04</u>	<u>1.55E-03</u>	6.20E-04	0.092	0.185	<u>9.31E-04</u>	0.013	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.013
6/2/20	2.538	67.595	<u>8.82E-04</u>	<u>5.88E-04</u>	<u>1.47E-03</u>	<u>5.88E-04</u>	0.124	1.005	2.12E-03	0.036	<u>0.001</u>	<u>0.003</u>	<u>0.001</u>	0.030
6/8/20	3.038	30.515	<u>8.40E-04</u>	<u>5.60E-04</u>	<u>1.40E-03</u>	<u>5.60E-04</u>	0.153	0.396	<u>8.40E-04</u>	0.014	<u>0.001</u>	<u>0.003</u>	<u>0.001</u>	0.017
6/14/20	0.707	32.576	<u>8.51E-04</u>	<u>5.68E-04</u>	<u>1.42E-03</u>	<u>5.68E-04</u>	0.142	1.260	<u>8.51E-04</u>	0.042	<u>0.001</u>	<u>0.003</u>	<u>0.001</u>	0.010
6/20/20	0.666	16.391	<u>9.42E-04</u>	<u>6.28E-04</u>	<u>1.57E-03</u>	<u>6.28E-04</u>	0.125	0.235	<u>9.42E-04</u>	0.010	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.007
6/26/20	4.078	22.915	<u>9.37E-04</u>	<u>6.24E-04</u>	<u>1.56E-03</u>	<u>6.24E-04</u>	0.070	0.237	<u>9.37E-04</u>	0.007	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.009
		 					1					I		
Geometric mean	1.93	21.46	9.02E-04	6.01E-04	1.50E-03	6.01E-04	7.65E-02	2.82E-01	9.76E-04	9.91E-03	9.02E-04	3.01E-03	1.50E-03	1.04E-02
Arithmetic mean	2.64	26.60	9.02E-04	6.02E-04	1.50E-03	6.02E-04	8.83E-02	4.12E-01	1.01E-03	1.46E-02	9.02E-04	3.01E-03	1.50E-03	1.17E-02
Max. concentration	7.41	67.60	9.42E-04	6.28E-04	1.57E-03	6.28E-04	1.53E-01	1.26E+00	2.12E-03	4.24E-02	9.42E-04	3.14E-03	1.57E-03	2.96E-02
Min. concentration	0.31	6.02	8.40E-04	5.60E-04	1.40E-03	5.60E-04	3.02E-02	7.04E-02	8.40E-04	1.99E-03	8.40E-04	2.80E-03	1.40E-03	6.25E-03
90th percentile	4.33	38.70	9.37E-04	6.24E-04	1.56E-03	6.24E-04	1.42E-01	1.01E+00	9.42E-04	3.60E-02	9.37E-04	3.12E-03	1.56E-03	1.66E-02
95th percentile	5.37	53.15	9.39E-04	6.26E-04	1.57E-03	6.26E-04	1.47E-01	1.13E+00	1.53E-03	3.92E-02	9.39E-04	3.13E-03	1.57E-03	2.31E-02
CAAQS	28	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
No. > CAAQS value*	0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AAQC	N/A	120	0.3	0.025	0.5	0.1	50	4	0.5	0.4	0.2	10	2	120
No. > AAQC	0	0	0	0	0	0	0	0	0	0	0	0	0	0
No. of valid samples	15	11	11	11	11	11	11	11	11	11	11	11	11	11
No. samples < mdl	1	0	11	11	11	11	0	0	10	0	11	11	11	0
Detection limit (μg)	15	2300	3	2	5	2	4	20	3	1	3	10	5	5
Half detection limit (µg)	7.5	1150	1.5	1	2.5	1	2	10	1.5	0.5	1.5	5	2.5	2.5
% < detection limit	7	0	100	100	100	100	0	0	91	0	100	100	100	0
% valid data	100	73	73	73	73	73	73	73	73	73	73	73	73	73

% valid data 100 73 73 73 73 73 73 73 73 73 Notes: All non detectable results were reported as 1/2 detection limit and are denoted by italics & underlining (If samples had differing detection limits, the highest is displayed here) N/A: Not applicable

^{—:} Invalid Sample

^{*}Canadian Ambient Air Quality Standard, 24-hour standard



	Southwest Tait Road Monitoring Results (Valid and Invalid for TSP and Metals (Second Quarter 2020)													
					(res	ults expresse	ed in μg/m³)							
Date	PM2.5	TSP	As	Cd	Cr	Со	Cu	Fe	Pb	Mn	Ni	Se	٧	Zn
4/3/20	0.791	3.676	<u>3.70E-04</u>	2.47E-04	<u>6.17E-04</u>	2.47E-04	0.020	0.038	<u>3.70E-04</u>	0.001	<u>0.000</u>	<u>0.001</u>	<u>0.001</u>	0.006
4/9/20	3.289													
4/15/20	2.622	5.591	<u>7.91E-04</u>	<u>5.27E-04</u>	<u>1.32E-03</u>	<u>5.27E-04</u>	0.057	0.103	<u>7.91E-04</u>	0.003	<u>0.001</u>	<u>0.003</u>	<u>0.001</u>	0.007
4/21/20	<u>0.312</u>	73.297	<u>7.28E-04</u>	4.85E-04	<u>1.21E-03</u>	<u>4.85E-04</u>	0.040	0.927	<u>7.28E-04</u>	0.026	<u>0.001</u>	<u>0.002</u>	<u>0.001</u>	0.024
4/27/20	8.989	36.355	1.30E-03	8.64E-04	2.16E-03	8.64E-04	0.055	0.497	1.30E-03	0.014	0.001	0.004	0.002	0.012
5/3/20	2.456	12.645	<u>7.71E-04</u>	<u>5.14E-04</u>	<u>1.29E-03</u>	<u>5.14E-04</u>	0.027	0.195	<u>7.71E-04</u>	0.005	<u>0.001</u>	<u>0.003</u>	<u>0.001</u>	0.006
5/9/20	1.707	62.656	<u>7.52E-04</u>	<u>5.01E-04</u>	<u>1.25E-03</u>	<u>5.01E-04</u>	0.049	0.972	<u>7.52E-04</u>	0.023	<u>0.001</u>	<u>0.003</u>	<u>0.001</u>	0.017
5/15/20	1.540	27.036	<u>9.66E-04</u>	6.44E-04	<u>1.61E-03</u>	<u>6.44E-04</u>	0.059	0.388	9.66E-04	0.010	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.009
5/21/20	2.913	47.981	<u>1.12E-03</u>	7.49E-04	<u>1.87E-03</u>	<u>7.49E-04</u>	0.070	0.838	<u>1.12E-03</u>	0.020	<u>0.001</u>	<u>0.004</u>	<u>0.002</u>	0.021
5/27/20	4.123	53.034	<u>9.68E-04</u>	<u>6.45E-04</u>	<u>1.61E-03</u>	<u>6.45E-04</u>	0.051	0.459	9.68E-04	0.020	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.022
6/2/20	1.540	55.028	<u>9.19E-04</u>	<u>6.13E-04</u>	<u>1.53E-03</u>	<u>6.13E-04</u>	0.069	1.048	<u>9.19E-04</u>	0.038	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.015
6/8/20	7.155	40.392	<u>1.11E-03</u>	7.40E-04	<u>1.85E-03</u>	7.40E-04	0.073	0.755	<u>1.11E-03</u>	0.021	<u>0.001</u>	<u>0.004</u>	<u>0.002</u>	0.018
6/14/20	0.312	50.174	<u>9.14E-04</u>	<u>6.10E-04</u>	<u>1.52E-03</u>	<u>6.10E-04</u>	0.034	1.414	<u>9.14E-04</u>	0.043	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.015
6/20/20	2.289	19.336	<u>9.39E-04</u>	<u>6.26E-04</u>	<u>1.56E-03</u>	6.26E-04	0.043	0.496	<u>9.39E-04</u>	0.012	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.007
6/26/20	0.874	23.179	<u>9.77E-04</u>	<u>6.51E-04</u>	<u>1.63E-03</u>	<u>6.51E-04</u>	0.064	0.334	<u>9.77E-04</u>	0.008	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.006
	1	1		,		Ī							1	
Geometric mean	1.85	27.60	8.71E-04	5.80E-04	1.45E-03	5.80E-04	4.76E-02	4.38E-01	8.71E-04	1.22E-02	8.71E-04	2.90E-03	1.45E-03	1.15E-02
Arithmetic mean	2.73	36.46	9.02E-04	6.01E-04	1.50E-03	6.01E-04	5.06E-02	6.05E-01	9.02E-04	1.74E-02	9.02E-04	3.01E-03	1.50E-03	1.32E-02
Max. concentration	8.99	73.30	1.30E-03	8.64E-04	2.16E-03	8.64E-04	7.29E-02	1.41E+00	1.30E-03	4.31E-02	1.30E-03	4.32E-03	2.16E-03	2.45E-02
Min. concentration	0.31	3.68	3.70E-04	2.47E-04	6.17E-04	2.47E-04	1.98E-02	3.77E-02	3.70E-04	1.23E-03	3.70E-04	1.23E-03	6.17E-04	5.53E-03
90th percentile	5.94	60.37	1.12E-03	7.46E-04	1.86E-03	7.46E-04	6.96E-02	1.03E+00	1.12E-03	3.45E-02	1.12E-03	3.73E-03	1.86E-03	2.17E-02
95th percentile	7.70	66.38	1.18E-03	7.89E-04	1.97E-03	7.89E-04	7.11E-02	1.18E+00	1.18E-03	3.98E-02	1.18E-03	3.94E-03	1.97E-03	2.29E-02
CAAQS	28	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
No. > CAAQS value*	0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AAQC	N/A	120	0.3	0.025	0.5	0.1	50	4	0.5	0.4	0.2	10	2	120
No. > AAQC	0	0	0	0	0	0	0	0	0	0	0	0	0	0
No. of valid samples	15	14	14	14	14	14	14	14	14	14	14	14	14	14
No. samples < mdl	2	0	13	13	13	13	0	0	13	0	13	13	13	0
Detection limit (µg)	15	2300	3	2	5	2	4	20	3	1	3	10	5	5
Half detection limit (µg)	7.5	1150	1.5	1	2.5	1	2	10	1.5	0.5	1.5	5	2.5	2.5
% < detection limit	13	0	93	93	93	93	0	0	93	0	93	93	93	0
% valid data	100	93	93	93	93	93	93	93	93	93	93	93	93	93

Notes: All non detectable results were reported as 1/2 detection limit and are denoted by italics & underlining (If samples had differing detection limits, the highest is displayed here)

N/A: Not applicable
—: Invalid Sample

^{*}Canadian Ambient Air Quality Standard, 24-hour standard



			ortheast Gallinge			-			, 2000 40					
			_		` 1	ts expressed		_				<u> </u>	I	_
Date	PM2.5	TSP	As	Cd	Cr	Со	Cu	Fe	Pb	Mn	Ni	Se	V	Zn
4/3/20	1.958	222.087	<u>7.62E-04</u>	<u>5.08E-04</u>	<u>1.27E-03</u>	<u>5.08E-04</u>	0.037	0.219	<u>7.62E-04</u>	0.007	<u>0.001</u>	<u>0.003</u>	<u>0.001</u>	0.017
4/9/20	1.373	7.839	<u>8.52E-04</u>	<u>5.68E-04</u>	<u>1.42E-03</u>	<u>5.68E-04</u>	0.030	0.070	<u>8.52E-04</u>	0.002	<u>0.001</u>	<u>0.003</u>	<u>0.001</u>	0.006
4/15/20	7.407	94.092	<u>7.71E-04</u>	<u>5.14E-04</u>	<u>1.29E-03</u>	<u>5.14E-04</u>	0.034	1.157	2.31E-03	0.034	<u>0.001</u>	<u>0.003</u>	<u>0.001</u>	0.042
4/21/20	1.291		-											
4/27/20	3.332	17.126	<u>9.05E-04</u>	<u>6.03E-04</u>	<u>1.51E-03</u>	6.03E-04	0.031	0.502	<u>9.05E-04</u>	0.016	<u>0.001</u>	0.003	<u>0.002</u>	0.008
5/3/20	0.708	6.020	<u>9.31E-04</u>	<u>6.21E-04</u>	<u>1.55E-03</u>	<u>6.21E-04</u>	0.038	0.079	<u>9.31E-04</u>	0.002	<u>0.001</u>	0.003	<u>0.002</u>	0.007
5/9/20	<u>0.312</u>	10.154	<u>8.06E-04</u>	<u>5.37E-04</u>	1.34E-03	<u>5.37E-04</u>	0.084	0.156	<u>8.06E-04</u>	0.004	<u>0.001</u>	<u>0.003</u>	<u>0.001</u>	0.005
5/15/20	4.494	14.785	<u>9.20E-04</u>	<u>6.13E-04</u>	<u>1.53E-03</u>	<u>6.13E-04</u>	0.097	0.148	<u>9.20E-04</u>	0.005	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.008
5/21/20	3.745	38.701	<u>9.36E-04</u>	<u>6.24E-04</u>	<u>1.56E-03</u>	<u>6.24E-04</u>	0.069	0.416	<u>9.36E-04</u>	0.013	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.014
5/27/20	3.953	38.093	<u>9.31E-04</u>	6.20E-04	<u>1.55E-03</u>	<u>6.20E-04</u>	0.092	0.185	<u>9.31E-04</u>	0.013	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.013
6/2/20	2.538	67.595	<u>8.82E-04</u>	<u>5.88E-04</u>	<u>1.47E-03</u>	<u>5.88E-04</u>	0.124	1.005	2.12E-03	0.036	<u>0.001</u>	<u>0.003</u>	<u>0.001</u>	0.030
6/8/20	3.038	30.515	<u>8.40E-04</u>	<u>5.60E-04</u>	1.40E-03	<u>5.60E-04</u>	0.153	0.396	<u>8.40E-04</u>	0.014	<u>0.001</u>	<u>0.003</u>	<u>0.001</u>	0.017
6/14/20	0.707	32.576	<u>8.51E-04</u>	<u>5.68E-04</u>	<u>1.42E-03</u>	<u>5.68E-04</u>	0.142	1.260	<u>8.51E-04</u>	0.042	<u>0.001</u>	<u>0.003</u>	<u>0.001</u>	0.010
6/20/20	0.666	16.391	<u>9.42E-04</u>	<u>6.28E-04</u>	1.57E-03	6.28E-04	0.125	0.235	9.42E-04	0.010	<u>0.001</u>	0.003	<u>0.002</u>	0.007
6/26/20	4.078	22.915	<u>9.37E-04</u>	<u>6.24E-04</u>	<u>1.56E-03</u>	<u>6.24E-04</u>	0.070	0.237	<u>9.37E-04</u>	0.007	<u>0.001</u>	<u>0.003</u>	<u>0.002</u>	0.009
Geometric mean	1.93	26.72	8.74E-04	5.83E-04	1.46E-03	5.83E-04	6.90E-02	2.94E-01	1.01E-03	9.82E-03	8.74E-04	2.91E-03	1.46E-03	1.13E-02
Arithmetic mean	2.64	44.21	8.76E-04	5.84E-04	1.46E-03	5.84E-04	8.05E-02	4.33E-01	1.07E-03	1.46E-02	8.76E-04	2.92E-03	1.46E-03	1.38E-02
Max. concentration	7.41	222.09	9.42E-04	6.28E-04	1.57E-03	6.28E-04	1.53E-01	1.26E+00	2.31E-03	4.24E-02	9.42E-04	3.14E-03	1.57E-03	4.21E-02
Min. concentration	0.31	6.02	7.62E-04	5.08E-04	1.27E-03	5.08E-04	3.02E-02	7.04E-02	7.62E-04	1.99E-03	7.62E-04	2.54E-03	1.27E-03	5.10E-03
90th percentile	4.33	86.14	9.36E-04	6.24E-04	1.56E-03	6.24E-04	1.37E-01	1.11E+00	1.76E-03	3.54E-02	9.36E-04	3.12E-03	1.56E-03	2.58E-02
95th percentile	5.37	138.89	9.38E-04	6.26E-04	1.56E-03	6.26E-04	1.46E-01	1.19E+00	2.19E-03	3.82E-02	9.38E-04	3.13E-03	1.56E-03	3.40E-02
CAAQS	28	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
No. > CAAQS value*	0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AAQC	N/A	120	0.3	0.025	0.5	0.1	50	4	0.5	0.4	0.2	10	2	120
No. > AAQC	0	0	0	0	0	0	0	0	0	0	0	0	0	0
No. of valid samples	15	14	14	14	14	14	14	14	14	14	14	14	14	14
No. samples < mdl	1	0	14	14	14	14	0	0	12	0	14	14	14	0
Detection limit (µg)	15	2300	3	2	5	2	4	20	3	1	3	10	5	5
Half detection limit (µg)	7.5	1150	1.5	1	2.5	1	2	10	1.5	0.5	1.5	5	2.5	2.5
% < detection limit	7	0	100	100	100	100	0	0	86	0	100	100	100	0
% valid data	100	93	93	93	93	93	93	93	93	93	93	93	93	93

% valid data 100 93 93 93 93 93 93 93 93 Notes: All non detectable results were reported as 1/2 detection limit and are denoted by italics & underlining (If samples had differing detection limits, the highest is displayed here) N/A: Not applicable

^{—:} Invalid Sample

^{*}Canadian Ambient Air Quality Standard, 24-hour standard



APPENDIX A-2

TOTAL DUSTFALL SAMPLING RESULTS



Tait Road Monitoring Results for Dustfall (Second Quarter 2020)							
(results expressed in g/m²/30days)							
Month	No. Exposure Days	Dustfall (insoluble)	Dustfall (soluble)	Tait (SW)			
April-20	29	1.5	0.36	1.86			
May-20	31	2.61	<u>0.15</u>	2.91			
June-20	28	2.94	1.08	4.02			
		2.93					
		4.02					
		1.86					
		7					
		0					
	3						
		100					
	0						
	0.1						
		0.05					

Tait Road Monitoring Results for Dustfall (Second Quarter 2020)							
(results expressed in g/m²/30days)							
Month	No. Exposure Days	Dustfall (insoluble)	Dustfall (soluble)	Gallinger (NE)			
April-20	29	1.08	0.42	1.53			
May-20	31	0.87	0.39	1.26			
June-20	28	2.13	2.19	4.32			
		2.37					
		4.32					
		1.26					
		7					
		0					
		3					
		100					
		0					
		0.1					
Half detection limit 0.05							

Notes:

All statistics were calculated using 1/2DL for values reported as <DL

All non detectable results were reported as 1/2 detection limit and are denoted by italics and underlining N/A: Not applicable

^{—:} Invalid Sample

^{*}If samples had differing detection limits, the highest is displayed here

^{**}Ontario Ambient Air Quality Criteria, 30-day standard



APPENDIX A-3

SO₂ AND NO₂ PASSIVE SAMPLING RESULTS



APPENDIX B

NOTICES OF EXCEEDANCE FOR Q2 2020



APPENDIX C

LABORATORY RESULTS - CERTIFICATES OF ANALYSIS



APPENDIX D

PQ200 & TE-5170 CALIBRATION SHEETS - Q2 2020